


Installation Instructions



Standard Frame Deluxe 15 x 15

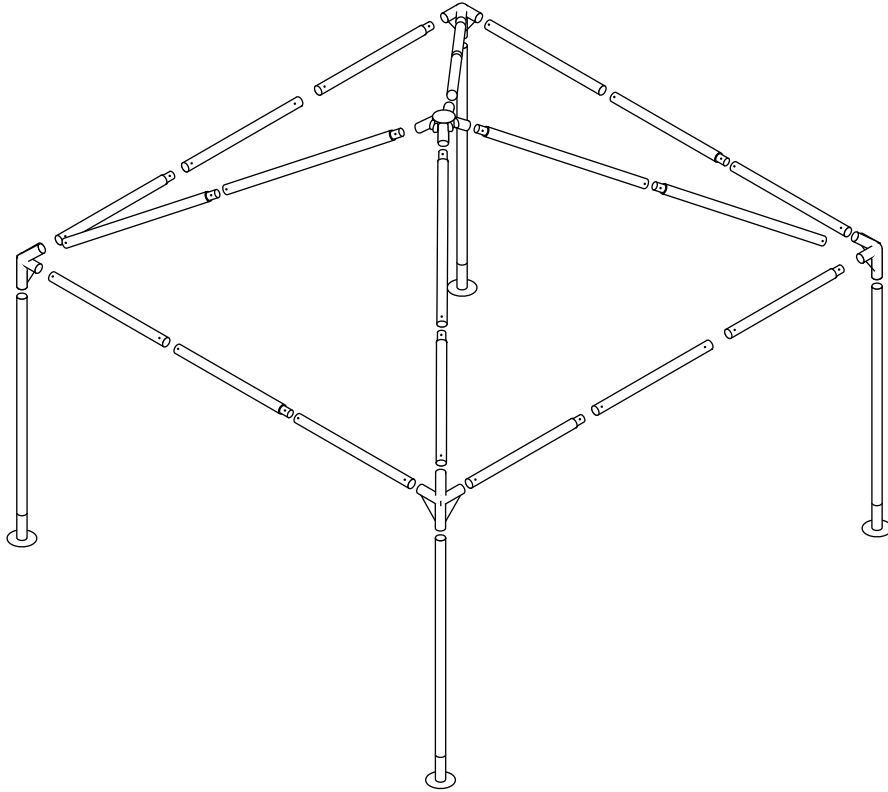

TopTec Products, LLC
7601 Highway 221
Moore, SC 29369
Phone: (800) 845-2830
Fax: (800) 921-7750
e-mail: sales@TopTecProducts.com
www.TopTecProducts.com

Installation Instructions

Anchoring Requirements (Non-Certified Tents)

Non-certified tents are not engineered to meet specific wind loads. Wind loads are approximate and are generally rule of thumb calculations used in the industry based on actual field experience. Windload of a non-certified tent will vary to a maximum of approximately 30 to 50 mph dependent upon the style of type of tent. The structural integrity of the tent may exceed the soil's holding capacity even at wind loads of 30 to 50 mph.

Frame tents require approximately 1000 to 2000 lbs of holding power per anchor location (dependent on the size and style of the tent). For safety of all occupants, evacuation is recommended if weather becomes severe.

Severe storms have micro bursts of wind that may be recorded far in excess of the storm's highest winds. The installer is responsible for properly securing the temporary structure (tent). Soil conditions will vary and the wind loads that the temporary structure can handle could be significantly below its wind load capabilities.

Tent Size	Square Feet	Anchor Pounds Required	Safety Factor	Anchor Locations	Holding Power Required at Each Anchor Location
15X15	225	2160	1.5	4	540lbs.*

*Holding power is based on firm soil conditions. If other conditions prevail, the holding power will decrease and alternate anchoring methods are required.

Installed Tent Inspection

Staking: Check all stakes for signs of movement.


Tensioning: Check all ropes/straps for proper tension and make sure that the tent top is set for proper drainage.

Poles: Check that all poles are properly aligned, securely tied, and structurally sound.

Sidewalls: Check that they are properly secured as needed.

Special Considerations: Make sure that the installation is in compliance with all local building, fire, and public safety codes.

Installation Instructions

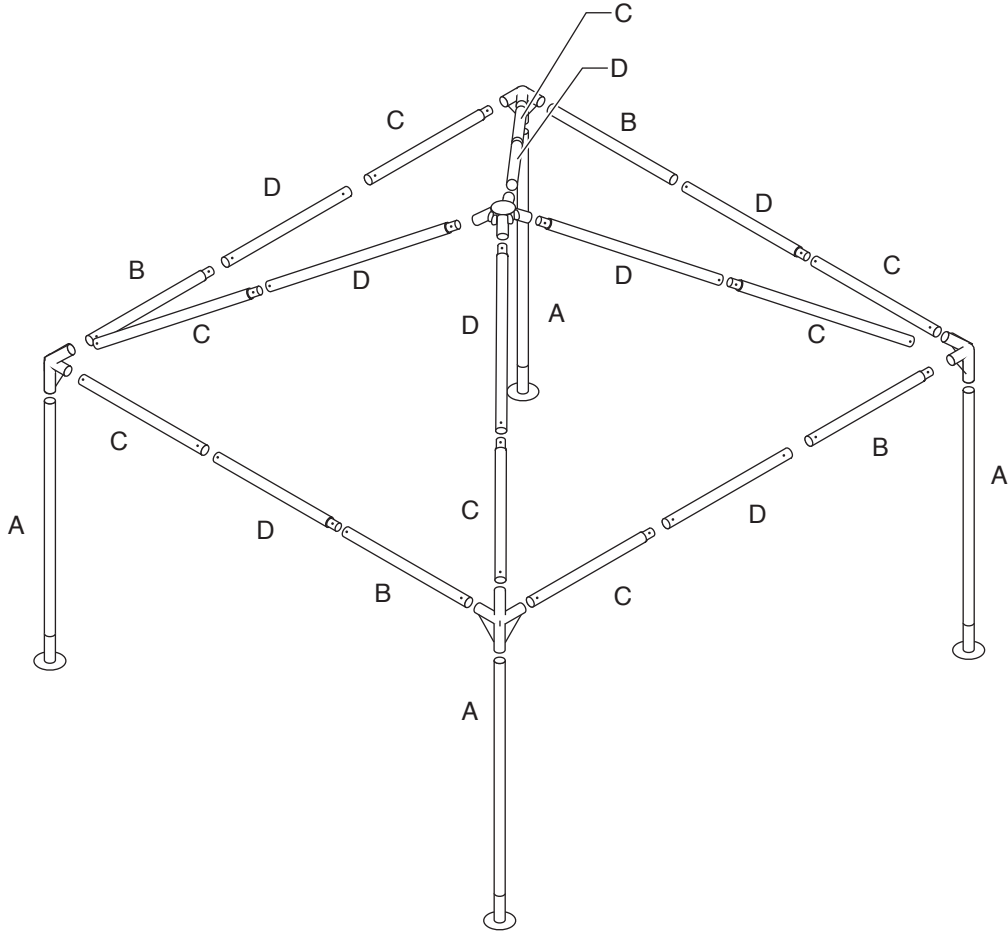

Corner Bracket



Crown Cluster

- A POLE → 1.75" OD X 60" Female/Female Single Snap Button (Leg)
- B POLE → 1.75" OD X 58" Female/Female Single Snap Button
- C POLE → 1.75" OD X 58" Male/Female Double Snap Button
- D POLE → 1.75" OD X 58" Male/Female Single Snap Button

Tent Size	No. Legs	No. Ropes or Straps	No. Stakes	Leg Spacing	Leg Height	Square Feet
15X15	4	4	4	15'	7'	225